



Myloc8 Halo GPS tracker


Myloc8 Halo is a stylish and lightweight keyring tracker equipped with an SOS button, combining practicality and peace of mind for keeping track of your essentials.



Unique features

- Real-Time alerts**
Immediate location change alerts and multiple geofence setups.
- Worldwide coverage**
- Durable & Waterproof**
- Speed monitoring**
- Supports 4G with fallback to 3G/2G**
- long battery life**
Up to 5 days per charge. *Depending on mode of operation and cellular network conditions.
- Small & Lightweight**
- Adjustable clip**
- Geofencing**
- One account for all your devices**

Myloc8 application

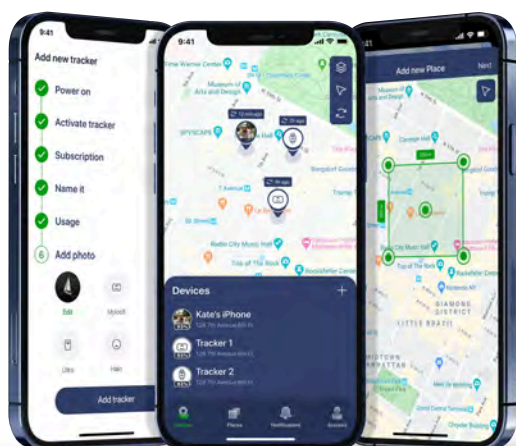

SIM card included

Myloc8 is part of the Trackimo™ Group, a world-leading provider of personal safety and asset tracking IoT solutions, combining hardware, software, and communications expertise for over 15 years. We are trusted by global partners such as Vodafone™ and Paramount™.

Specifications

Cellular

| | |
|--------------------|--|
| Stock code | MYLC006 |
| Network technology | LTE(4G) CAT4 with fallback to GPRS(2G) and HSPA(3G) |
| Frequency bands | 2G Band 2/3/5/8 (850/900/1800/1900 MHz) 3G Band 1/2/5/8 (850/900/1900/2100 MHz) 4G Band 1/2/3/4/5/7/8/12/17/ 18/19/20/25/26 |
| Data support | SMS, UDP / IP TCP / IP |
| SIM card socket | Embedded SIM |
| Roaming data | Yes |
| Antena | Embedded cellular antenna |

Positioning

| | |
|---------------------------|---|
| GNSS receiver | 22 tracking / 66 acquisition channels |
| GNSS engine | GPS, Beidou, GLONASS, QZSS |
| Other location technology | Wi-Fi Networks / Cell ID |
| SBAS support | WAAS, EGNOS, GAGAN, BDSBAS, MSAS |
| Tracking sensitivity | -160dBm tracking sensitivity -147dBm Acquisition sensitivity with cold start |
| Acquisition time | Hot Start < 2 seconds (open sky) Cold Start < 30 seconds (open sky) |
| Location accuracy | < 5 meters (open sky) |
| A-GPS | Supported |

Wireless

| | |
|-----------|-------------|
| Bluetooth | BLE 5.2 |
| Wi - Fi | 802.11b/g/n |

Environmental

| | |
|-----------------------|---|
| Operating temperature | -20°C to +60°C (recharge 0°C to +40°C) |
| Humidity | 95%RH@ 50°C Non-condensing |

Sensors

| | |
|---------------|-------------|
| Accelerometer | 3-axis ±16g |
|---------------|-------------|

Electrical

| | |
|--------------------|--|
| Operating voltage | 3.7 V |
| Battery type | Rechargeable Li-ion |
| Battery capability | 500 mAh |
| Battery life | Up to 5 days, depending on mode of operation and cellular network conditions |

Physical

| | |
|------------|--------------------------------|
| Dimensions | 16.4 mm height, 42 mm diameter |
| Weight | 30 g |

Connectors

| | |
|-------------|--|
| USB charger | 4 - points magnetic charger with USB, 5V 500mA |
|-------------|--|

Application features

| | |
|--------------------------|------------------|
| Full data or alert only | Full Data |
| Maps | ✓ |
| Real time updates | ✓ |
| Geo speed alerts | ✓ |
| Geo fence alerts | ✓ |
| Travel history available | Up to 365 days |
| Alerts | Email, SMS, Push |
| No of location samples | Unlimited |
| Customizable tracking | ✓ |
| Global tracking | ✓ |
| SOS alarm | ✓ |
| Minimal update interval | 5 Sec* |
| Play sound | ✓ |

Certifications

| | |
|-----------|-----------------------------------|
| Standards | FCC/ISED/CE/ROHS/REACH/JATE/TELEC |
|-----------|-----------------------------------|

* The minimum standard tracking period is 60 seconds. Faster tracking costs might vary. Please contact your sales representative for more details.

Last updated: 26 June 2025